




> RMH72-385~400AB1 385~400 Watt

158mm 144Cells PV ALL BLACK Module

> 25 years product warranty

30 years performance warranty

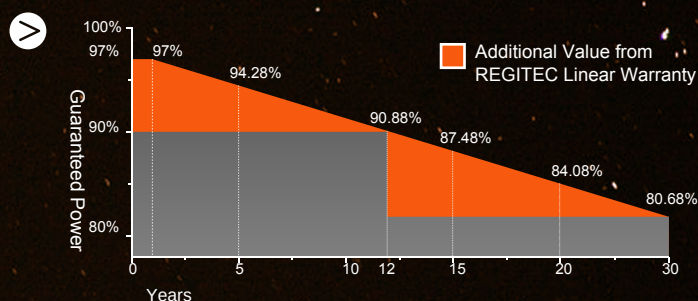

> PRODUCT FEATURE



High transmissivity, low-iron tempered glass.



Using high efficiency mono solar cells



Excellent performance in low-light environments



High quality junction box and connector systems



100% inspection, to guarantee the reliability of solar systems



Anti LID



Anti PID



Lower temperature coefficient



Quality RFID Tracking

> MANAGEMENT SYSTEM



ISO 9001:
Quality management system



ISO 14001:
Standard for environmental management system




OHSAS 18001:
International standard for occupational health and safety assessment system

> PRODUCT CERTIFICATES



Dimension Drawing


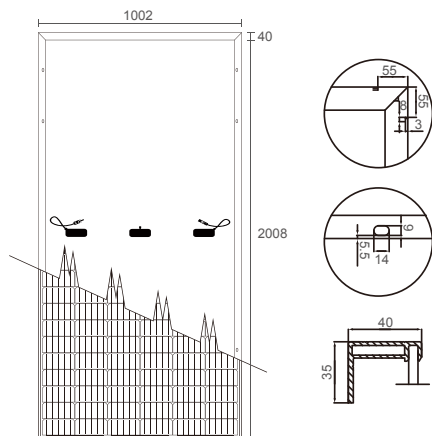


All Dimensions in mm

The above drawing is a graphical representation of the product.
For engineering quality drawings please contact REGITEC.

I-V Graph

Current-Voltage & Power-Voltage Curves (RMH72-400AB1)

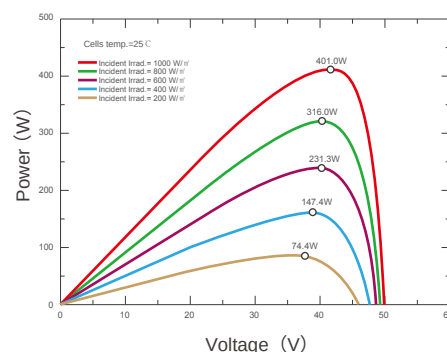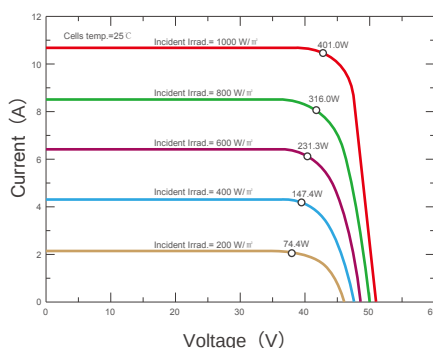

Electrical Characteristics (STC/NOCT)

Module Type	RMH72-385AB1		RMH72-390AB1		RMH72-395AB1		RMH72-400AB1	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power- Pmax(W)	385	286	390	289	395	292	400	296
Open Circuit Voltage - Voc(V)	49.1	45.1	49.3	45.4	49.5	45.7	49.8	46.0
Short- Circuit Current - Isc(A)	10.02	8.10	10.12	8.15	10.23	8.20	10.36	8.25
Voltage at Pmax -Vmp(V)	40.8	37.5	41.1	37.8	41.4	38.1	41.7	38.4
Current at Pmax - Imp(A)	9.44	7.59	9.49	7.64	9.55	7.69	9.60	7.74
Module Efficiency -ηm(%)	19.13	/	19.38	/	19.63	/	19.88	/
Power Tolerance(W)	(0, +4.99W)							
Maximum System Voltage(V)	1000/1500Vdc (IEC / UL)							
Maximum Series Fuse Rating (A)	20A							

STC : Irradiance 1000W/m², Cell Temperature 25°C, Air Mass 1.5

NOCT : Irradiance 800W/m², Ambient Temperature 20°C, Air Mass 1.5, Wind Speed 1m/s

Mechanical Specifications

External Dimensions	2008X1002X40mm
Weight	22.5kg
Solar Cells	Mono crystalline 158.75x79.375mm (2x72pcs)
Front Glass	AR Coated 3.2 mm tempered glass
Frame	Anodized aluminum alloy
Junction Box	IP68
Output Cables	4.0mm ² , 500mm (+), 500mm (-), length can be customized
Connector	MC4 Compatible
Mechanical Load	Front Side Max. 5400Pa, Rear Side Max. 2400Pa

Packing Configuration

	2008X1002X40mm	
Container	20'GP	40'HQ
Pieces per Pallet	27	29
Pallets per Container	10	22
Pieces per Container	270	638

Temperature Characteristics

Pmax Temperature Coefficient	-0.350%/°C
Voc Temperature Coefficient	-0.270%/°C
Isc Temperature Coefficient	+0.048%/°C
Operating Temperature	-40 ~ +85°C
Nominal Operating Cell Temperature(NOCT)	45±2°C